


## OCULAR

Sightglass with full bore

DIN-EN: DN 15 - 250 / PN 10 - 40 ASME: NPS 1" - 4" / class 150

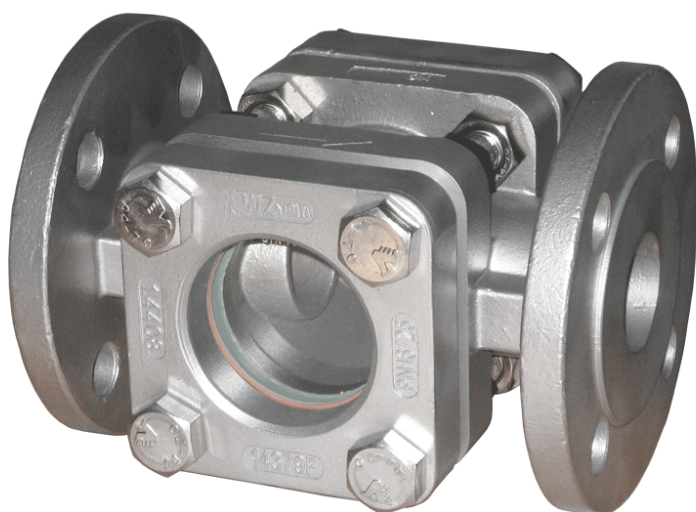

## Design Features

### Design Characteristics

- temperatur range up to 280°C
- entry nozzle for turbulences
- heating jacket (option)

## Materials

### Standard

- Carbon Steel 1.0619 / ASTM A216 WCB
- Stainless steel 1.4408 / ASTM A351 CF8M
- Stainless steel 1.4308 / ASTM A351 CF8M
- Unalloyed stainless steel casting (low Temp.) 1.1138 / LCC/LCB / A352

### Special materials


- other materials on request

### Sightglass

- Borosilikat

## Dimensions

	DN	PN	L
DIN 3202/EN 558-1	15	10-40	130
	20	10-40	150
	25	10-40	160
	32	10-40	180
	40	10-40	200
	50	10-40	230
	65	10-40	290
	80	10-40	310
	100	10/16 25/40	350
	150	10/16 25/40	480
ASME B 16.5	200	10/16 25/40	600
	250	10/16 25/40	730
	NPS	PN	L
	1"	150	127
	1½"	150	165
	2"	150	178
3"	150	203	
4"	150	229	

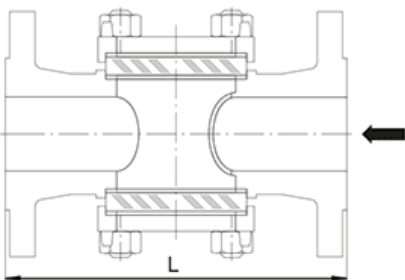

Higher pressure load on request